

NOTES:

1. SUBSTRATE MATERIAL: FUSED SILICA

2. COATING (APPLY ACROSS CLEAR APERTURE)

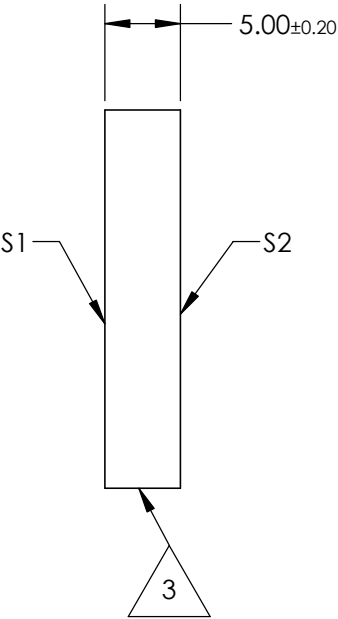
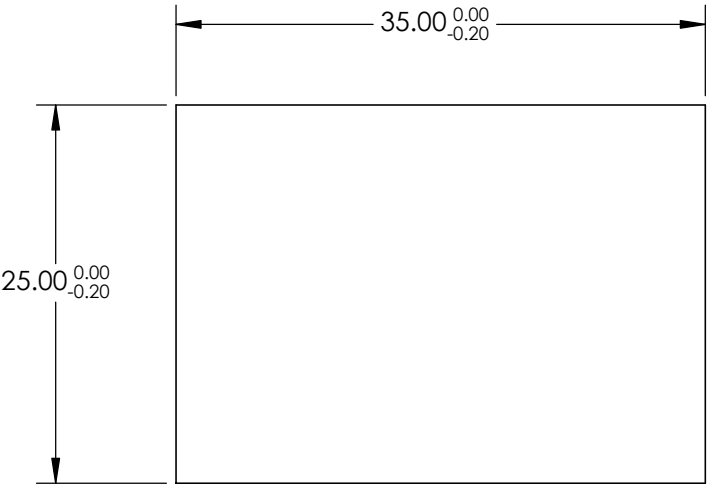
S1:  
R(AVG) >98% @ 750 - 1100nm (0 - 45°) ALL POLARIZATIONS  
R(AVG) >99% @ 750 - 1100nm (0°) ALL POLARIZATIONS

S2: NONE

3. FINE GROUND SURFACE



4. RoHS COMPLIANT

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

	S1	S2
SHAPE	PLANO	PLANO
CLEAR APERTURE (%)	90	N/A
SURFACE QUALITY	20-10	COMMERCIAL POLISH
SURFACE FLATNESS	λ/10 (BEFORE COATING)	N/A
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION 			
TITLE		25 x 35mm 750 - 1100 Broadband λ/10 Mirror	
ALL DIMS IN	mm	DWG NO	29347
		SHEET 1 OF 1	