


NOTES

1. SUBSTRATE: Fused Silica
2. COATING (APPLY ACROSS CLEAR APERTURE)
S1 & S2: NONE
3. SURFACE S2 TO BE PARALLEL TO SURFACE S1 TO WITHIN <1 ARCMIN

4.  FINE GRIND SURFACE


5. TRANSMITTED WAVEFRONT DISTORTION: ≤ 0.25 WAVE @632.8nm
6. RoHS COMPLIANT

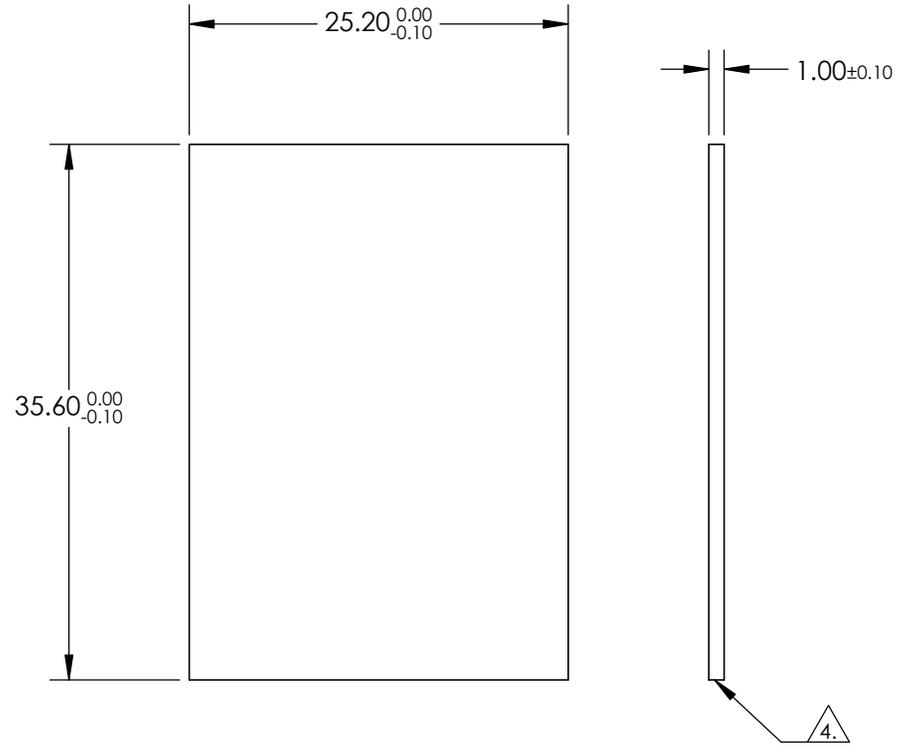

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|-----------------|---------------------|---------------------|
| SHAPE | PLANO | PLANO |
| SURFACE QUALITY | 40 - 20 | 40 - 20 |
| CLEAR APERTURE | 22.68 x 32.04 | 22.68 x 32.04 |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED |

THIRD ANGLE PROJECTION 

ALL DIMS IN mm

 **Edmund Optics®**

TITLE

25.2 x 35.6mm, 1mm Thick, Uncoated λ/4
Fused Silica Window

DWG NO

29299

SHEET
1 OF 1