
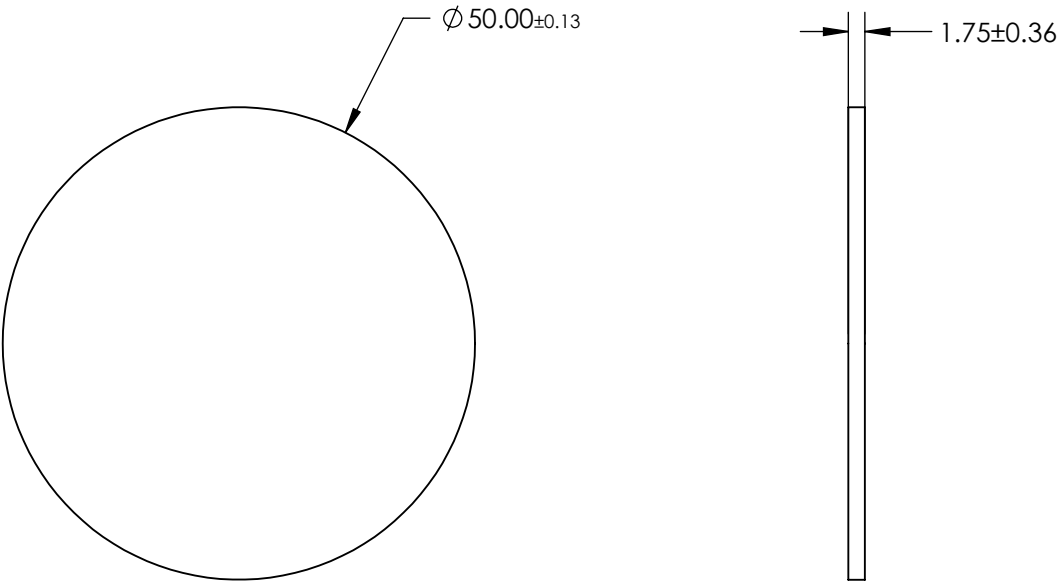


- NOTES:
- 1. SUBSTRATE:
PMMA, PERMANENTLY LAMINATED TO PET FILM WITH HARD MICROSTRUCTURED POLYMER COATING
 - 2. TYPE OF DIFFUSER: Linear Batwing Diffuser
 - 3. DIFFUSING ANGLE (°): 120
 - 4. OPERATING TEMPERATURE (°C): -34 to +70
 - 5. FOR OPTIMAL PERFORMANCE, GLOSSY, NON-MATTE SIDE SHOULD FACE INCIDENT LIGHT.



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

<div><div>EO[®]</div><div>Edmund Optics[®]</div></div>			
THIRD ANGLE PROJECTION 		TITLE	50mm Dia., 120° Diffusion Angle, Linear Batwing Diffuser
ALL DIMS IN	mm	DWG NO	70771
			SHEET 5 OF 11