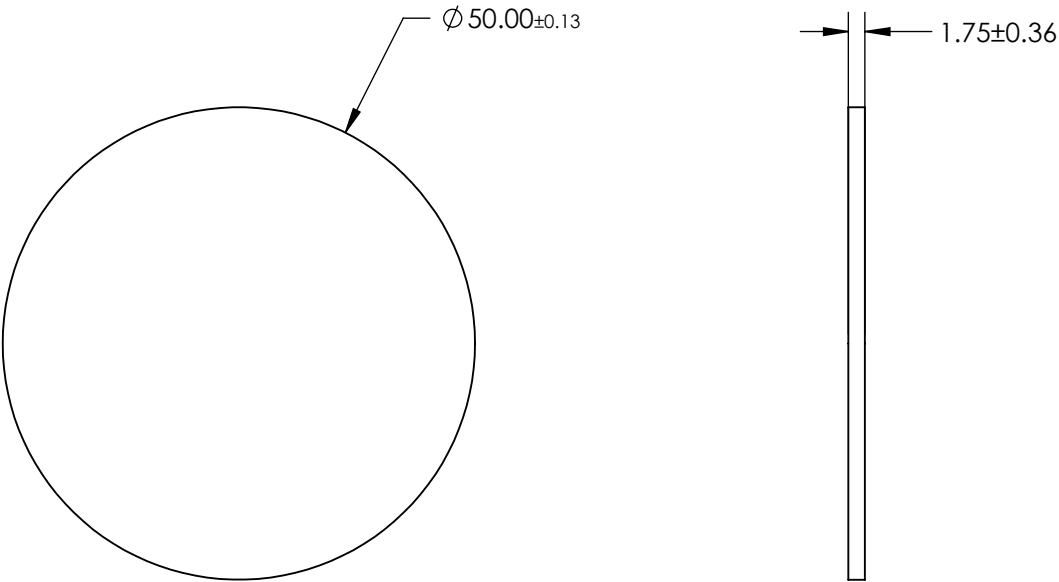




- NOTES:
- 1. SUBSTRATE:  
PMMA, PERMANENTLY LAMINATED TO PET FILM WITH HARD MICROSTRUCTURED POLYMER COATING
  - 2. TYPE OF DIFFUSER: Linear Batwing Diffuser
  - 3. DIFFUSING ANGLE (°): 124
  - 4. OPERATING TEMPERATURE (°C): -34 to +70
  - 5. FOR OPTIMAL PERFORMANCE, GLOSSY, NON-MATTE SIDE SHOULD FACE INCIDENT LIGHT.



SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:  
DO NOT MANUFACTURE  
PARTS TO THIS DRAWING**

 Edmund Optics®			
THIRD ANGLE PROJECTION 		TITLE	50mm Dia., 124° Diffusion Angle, Linear Batwing Diffuser
ALL DIMS IN	mm	DWG NO	70772
			SHEET 6 OF 11