
## NOTES:


- 1. SUBSTRATE: FLOAT GLASS
- 2. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: BBAR (425-700nm) R(AVG) ≤0.5% @ 425 - 700nm



4. ROHS COMPLIANT

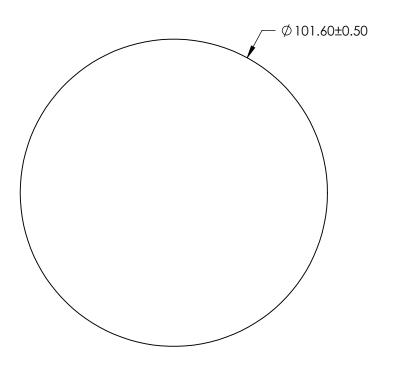

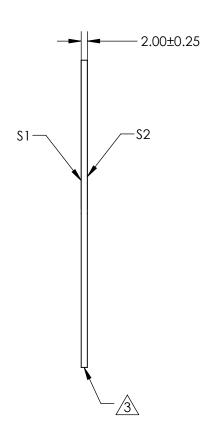

## FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

	\$1	\$2
SHAPE	PLANO	PLANO
SURFACE QUALITY	80 - 50	80 - 50
CLEAR APERTURE	Ø91.44	Ø91.44
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED

			<b>Edmund Optics</b> ®		
	THIRD ANGLE PROJECTION		TITLE	101.6mm Dia. x 2mm High Efficiency Window	
D	ALL DIMS IN	mm	DWG NO	71597	SHEET 6 OF 7