

NOTES:



1. SUBSTRATE: FLOAT GLASS

3. COATING (APPLY ACROSS CLEAR APERTURE)

S1 & S2: BBAR (425-700nm)
R(AVG) ≤0.5% @ 425 - 700nm

 FINE GRIND SURFACE

4. ROHS COMPLIANT

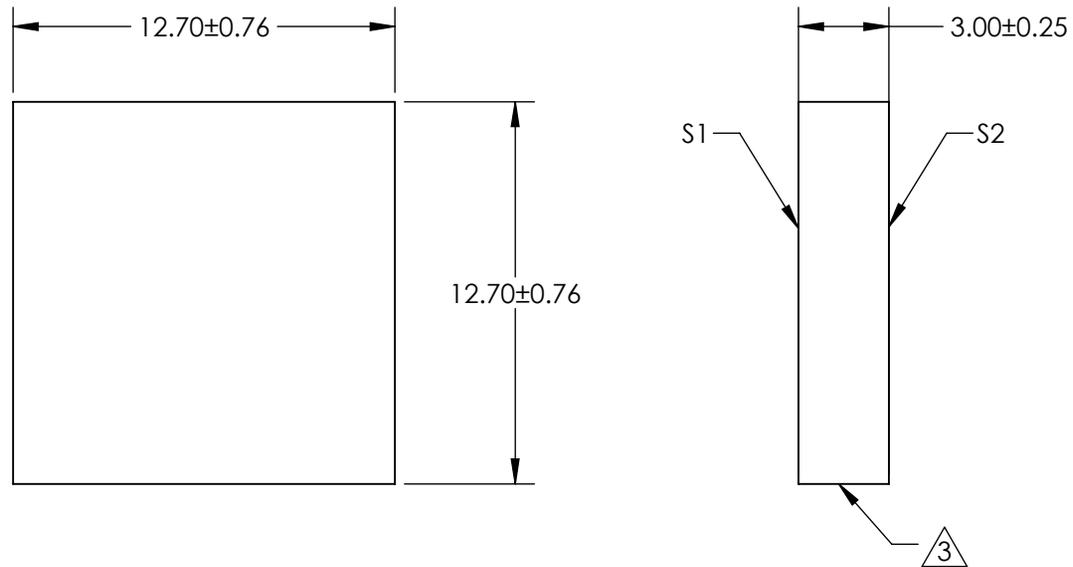

**FOR INFORMATION ONLY:
DO NOT MANUFACTURE
PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
DIMENSIONS ARE FOR REFERENCE ONLY

| | S1 | S2 |
|-----------------|---------------------|---------------------|
| SHAPE | PLANO | PLANO |
| SURFACE QUALITY | 80 - 50 | 80 - 50 |
| CLEAR APERTURE | 11.43 x 11.43 | 11.43 x 11.43 |
| BEVEL | PROTECTED AS NEEDED | PROTECTED AS NEEDED |



ALL DIMS IN

mm

 **Edmund Optics®**

TITLE

12.70 x 12.70 x 3mm High Efficiency Window

DWG NO

71583

SHEET
5 OF 6