
NOTES:

- 1. SUBSTRATE: FLOAT GLASS
- 3. COATING (APPLY ACROSS CLEAR APERTURE)

\$1 & \$2: BBAR (425-700nm) R(AVG) ≤0.5% @ 425 - 700nm



4. ROHS COMPLIANT

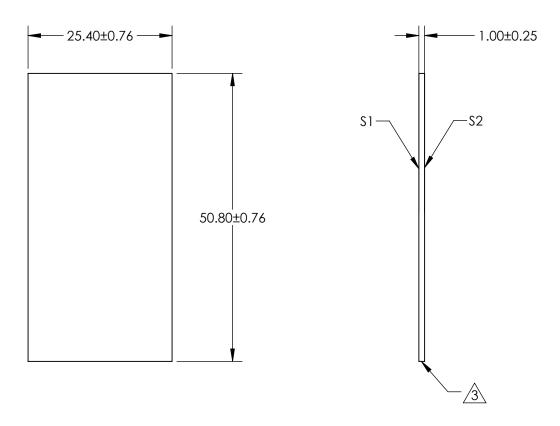

FOR INFORMATION ONLY: DO NOT MANUFACTURE PARTS TO THIS DRAWING

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE DIMENSIONS ARE FOR REFERENCE ONLY

			_			Edmund Optic	C ®
	\$1	\$2					,S
SHAPE	PLANO	PLANO		1		25.40 x 50.80 x 1mm High Efficiency Wir	ndow
SURFACE QUALITY	80 - 50	80 - 50	THIRD ANGLE PROJECTION		TITLE	20.40 × 30.00 × miniming it Emcleticy will dow	
CLEAR APERTURE	22.86 x 45.72	22.86 x 45.72		 			CUEET
BEVEL	PROTECTED AS NEEDED	PROTECTED AS NEEDED	ALL DIMS IN	mm	DWG NO	71584	SHEET 4 OF 6