
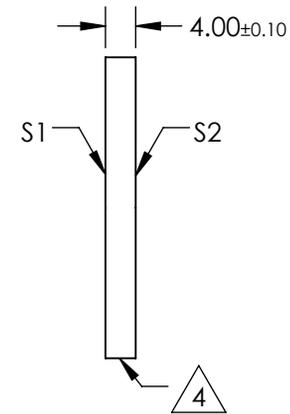
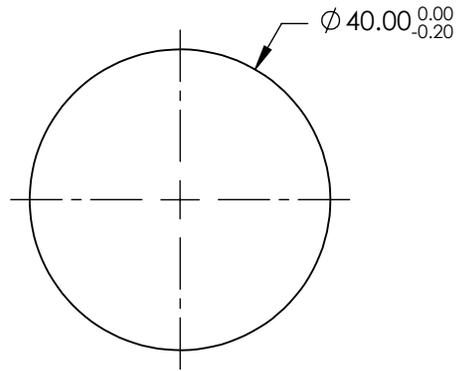


NOTES:

1. SUBSTRATE: UV GRADE FUSED SILICA
2. COATING (APPLY ACROSS CLEAR APERTURE)  
 S1 & S2: RABS  $\leq 1.0\%$  @ 350 - 450nm  
 RAVG  $\leq 1.5\%$  @ 250 - 700nm
3. SURFACE S2 TO BE PARALLEL WITH S1 TO  $< 5$  ARCSEC
4. FINE GRIND SURFACE
5. RoHS COMPLIANT

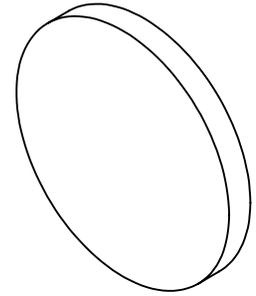

**FOR INFORMATION ONLY:  
 DO NOT MANUFACTURE  
 PARTS TO THIS DRAWING**

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE  
 DIMENSIONS ARE FOR REFERENCE ONLY

**EO**<sup>®</sup> Edmund Optics<sup>®</sup>

	S1	S2
SHAPE	PLANO	PLANO
SURFACE QUALITY	20-10	20-10
CLEAR APERTURE	$\varnothing 32.00$	$\varnothing 32.00$
BEVEL	PROTECTIVE AS NEEDED	PROTECTIVE AS NEEDED

THIRD ANGLE PROJECTION

ALL DIMS IN mm

TITLE	40mm DIA., 4mm THICK, UV-VIS COATED $\lambda/10$ FUSED SILICA WINDOW		
DWG NO	48068	SHEET	1 OF 1